

DH-IPC-K200/ 200A /200W

2Megapixel HD Cube Network Camera



Features

- 1/3" 2Megapixel progressive scan CMOS
- H.264 & MJPEG dual-stream encoding
- Max 25/30fps@1080P(1920×1080)
- DWDR, Day/Night, 3DNR, Auto iris, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- 3.6mm fixed lens
- White LEDs length 10m
- PIR sensor range 6m
- Micro SD memory (K200A only), PoE (K200A only), Wi-Fi (K200W only)

DH-IPC-K200/ 200A /200W

Technical Specifications


Model		DH-IPC-K200	DH-IPC-K200A	DH-IPC-K200W
Camera				
Image Sensor		1/3" 2Megapixel progressive scan CMOS		
Effective Pixels		1920(H)x1080(V)		
Scanning System		Progressive		
Electronic Shutter Speed		Auto/Manual, 1/3(4)~1/100000		
Min. Illumination		0.05lux/F1.8(color)		
S/N Ratio		More than 50dB		
Video Output		N/A		
Camera Features				
Max. LEDs Length		10m		
Day/Night		Auto(Electronic) / Color / B/W		
Backlight Compensation		BLC / HLC / DWDR		
White Balance		Auto/Manual		
Gain Control		Auto/Manual		
Noise Reduction		3D		
Privacy Masking		Up to 4 areas		
Lens				
Focal Length		3.6mm		
Max Aperture		F1.8		
Focus Control		Manual		
Angle of View		86.5°		
Lens Type		Fixed Lens		
Mount Type		Board-in Type		
Video				
Compression		H.264/MJPEG		
Resolution		1080P(1920x1080)/720P(1280x720)/D1/CIF		
Frame Rate	Main Stream	1080P/720P(1~25/30fps)		
	Sub Stream	D1/CIF(1 ~ 25/30fps)		
Bit Rate		H.264: 16K ~ 8192Kbps		
Audio				
Compression		N/A	G.711a / G.711u / PCM	
Interface		N/A	Built-in Mic, Built-in speaker	
Network				
Ethernet		RJ-45 (10/100Base-T)		
Wi-Fi		N/A		Wi-Fi(802.11b/g)
Protocol		IPv4/IPv6, HTTP, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour		
ONVIF		ONVIF Profile S		
Max. User Access		10 users		
Smart Phone		iPhone, iPad, Android, Windows Phone		

DH-IPC-K200/ 200A /200W

Auxiliary Interface			
Memory Slot	N/A	Micro SD, Max 64GB	N/A
RS485	N/A		
Alarm	N/A	1/1 channel In/Out	
PIR Sensor Range	Up to 6m		
General			
Power Supply	DC12V	DC12V,PoE(802.3af)	DC12V
Power Consumption	<4W	<4.5W	<5W
Working Environment	-20°C~+60°C, Less than 95%RH		-20°C~+50°C, Less than 95%RH
Ingress Protection	N/A		
Vandal Resistance	N/A		
Dimensions(W×D×H)	66.6mm×99.5mm×131.2mm		
Weight	0.35Kg (0.4kg with bracket)		

DH-IPC-K200/ 200A /200W

Dimensions (mm)

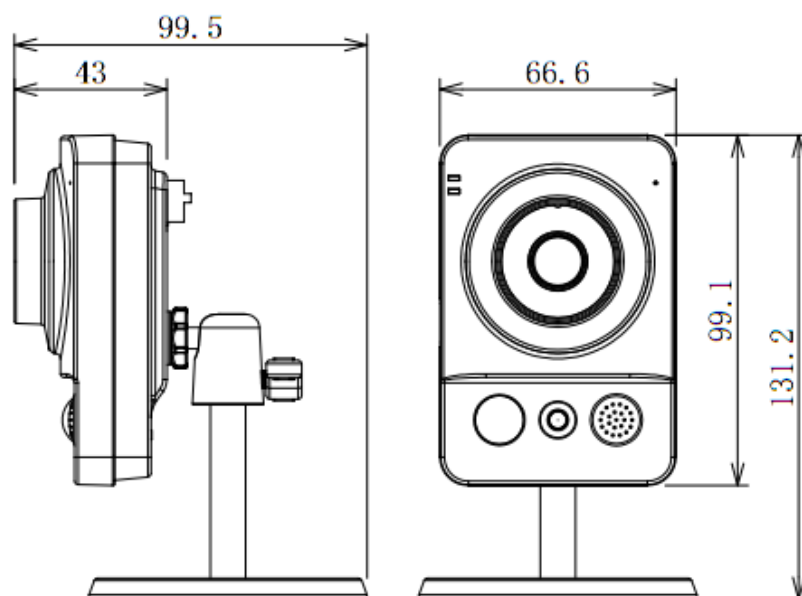

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2013 Dahua Technology Co., Ltd.